



E-KOMP

Portable Presses



Material	• Aluminium
Controllers	• Automatic process • Stepped dwell time • Manometer
Pressure	• Bottom airbag • Max. o.p. 7kg/cm ² (100PSI)
Heating	• Silicone heating elements • Max.T. 185°C (365°F)
Cooling	• Water
Belt Width	• Up to 1600mm (60")
Length of platen	• 365, 522, 627 & 728mm (14", 21", 25" y 29")
Platen angle	• 16°, 22° or 90°

Built-in controllers

No need to carry extra control unit. Simply plug it into electricity and it is ready to be used.

Light weight and easy to handle

FONMAR has developed this vulcaniser considering the main needs of our customers:

"A quick and easy-to-carry press."



Manometer




Up to 2 dwell levels

Specially for thicker belts, the stepped dwell time will improve the quality of your splices.

Different electrical configurations available

230V 16A configuration with independent platens also available.

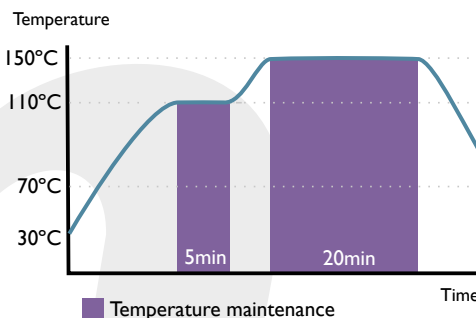

E-Komp 800x500 230V 16A with separate power connections.