


**Your partner
for food production efficiency**

High Friction belt for Rotary Cutters 1T8 U0-U2 HF W

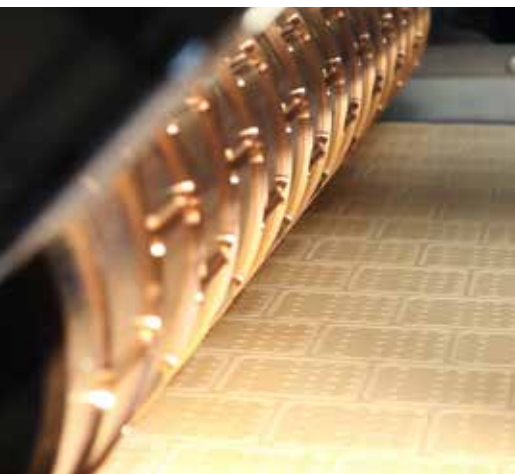

Specialized belt for rotary cutters assuring **optimal friction** and **release properties**.

The high mechanical properties guarantee an **excellent resistance to cutting**, increasing its **service life**.

KEY FEATURES	BENEFITS
HF (High Friction) surface holds the dough very firm under the blades	▶ Precise dough cutting
Optimal balance between friction and release	▶ Production efficiency
High mechanical resistance Shock absorbing	▶ Long service life



Code	Type	Conveying surface coating		Permanent antistatic	Total thickness mm	Min. diameter mm	Pull for 1% elongation N/mm	Temperature resistance °C	
		material	colour					min.	max.
NA-162	1T8 U0-U2 HF W	Polyurethane (TPU)	white	no	1.1	6	8	-20	100



Certified food Compliance

REGULATION EC 1935/2004 and amendments

REGULATION EC 2023/2006 and amendments

REGULATION EU 10/2011 and amendments

FDA (Food and Drug Administration)

